

enviro collection®

PVC FREE SCREEN FABRICS



PHOENIX

DESIGN: PHOENIX
 COMPOSITION: 100% Polyester
 OPENNESS FACTOR: 10%
 WIDTH: 300cm
 WEIGHT: 275gsm
 ROLL SIZE: 25m
 COLOURFASTNESS TO LIGHT: 6-8
 FABRIC THICKNESS: 0.46mm
 TENSILE STRENGTH: Warp 2070 N, Weft 2050 N
 TEAR STRENGTH: Warp 147 N, Weft 137 N
 FR CLASSIFICATION: Tested to AS1530.2 & NFPA 701
 CUTTING: Ultrasonic, Knife, Crush or Pressure
 Note: Blades must be sharp

Suitable for:



PANEL



ROLLER



FADE
RESISTANT



Solar Optical Properties

Colour	Solar Optical Properties				G-Factor				Light Fastness
	Ts	Rs	As	Tv	gtot-A	gtot-B	gtot-C	gtot-D	
SNOW	38.61	51.12	10.27	37.75	0.47	0.46	0.41	0.27	8
IVORY	37.37	53.16	9.47	36.90	0.45	0.45	0.40	0.26	7
PEBBLE	36.07	45.49	18.43	33.83	0.50	0.48	0.43	0.27	8
ASH	21.68	24.81	53.51	18.45	0.60	0.58	0.49	0.29	6
CINDER	33.69	40.80	25.51	31.14	0.52	0.51	0.44	0.28	8
SILVER	30.69	41.68	27.63	24.61	0.51	0.50	0.44	0.27	8
GREY	24.07	30.27	45.66	21.28	0.57	0.55	0.47	0.28	8
STEEL	10.02	9.16	80.82	9.36	0.67	0.65	0.54	0.30	8
EBONY	9.28	3.49	87.23	9.24	0.70	0.68	0.56	0.31	8


Ts: Solar Transmittance As: Solar Absorbance
 Rs: Solar Reflectance Tv: Visual Transmittance *Clear Glass

CARE: Fabric should be regularly dusted/vacuumed as appropriate.
 May be wiped with warm water and mild detergent

9 COLOURS



SNOW IVORY PEBBLE CINDER ASH SILVER GREY STEEL EBONY

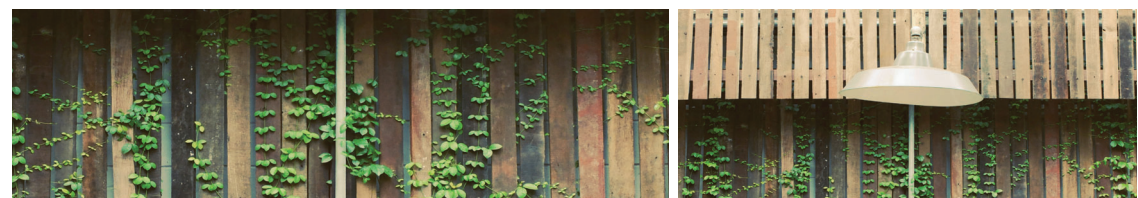

Established in 1926

phone: 1300 656 100

email: sales@wilsonfabrics.com.au

WWW.WILSONFABRICS.COM.AU